


EUROPEAN

COATINGS library

THE NEW TECHNICAL BOOK
FROM THE EUROPEAN COATINGS
LIBRARY COLLECTION!

Closing date for
advertisements:
**9 September
2022**

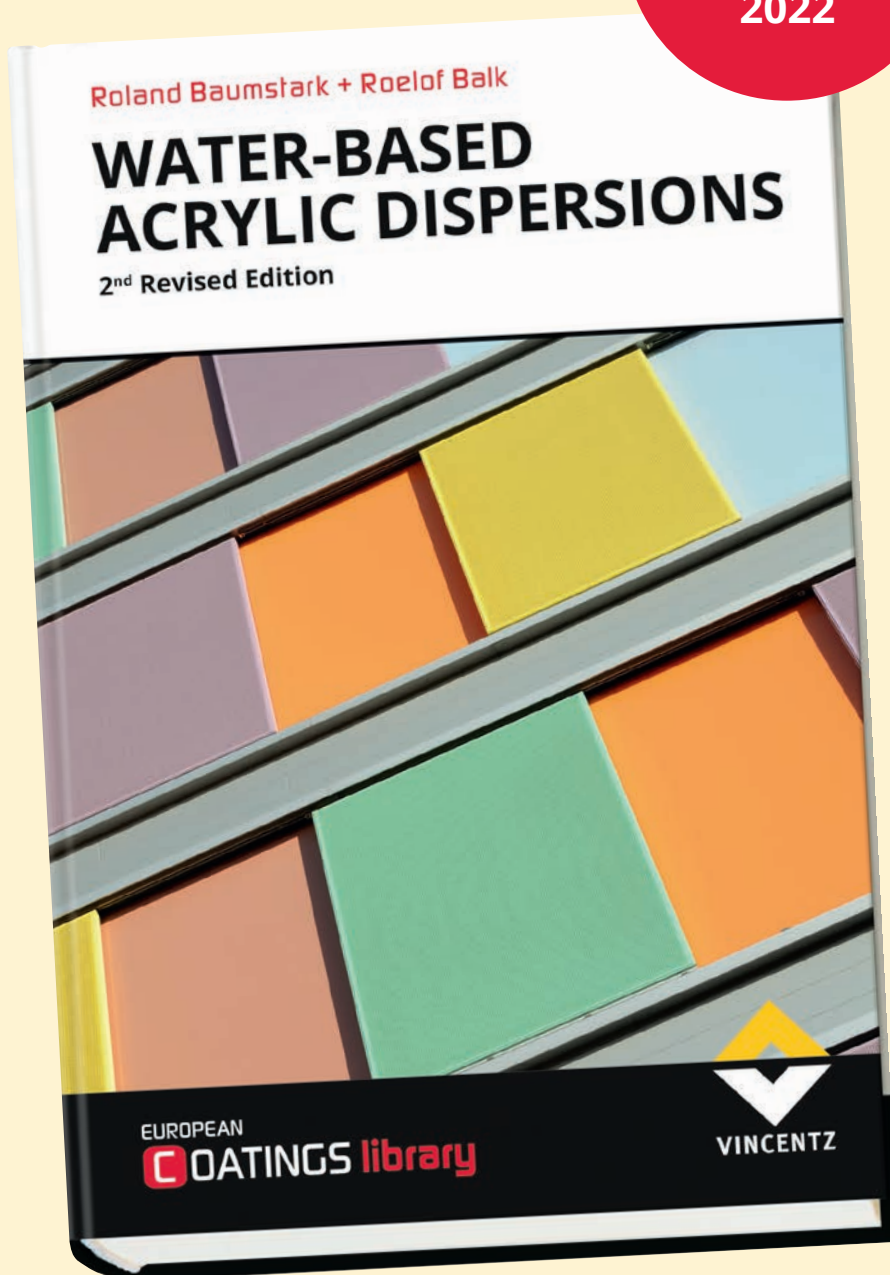

Advertising Contacts

Vincentz Network

Patricia Lüpertz
T +49 511 9910-249
patricia.luepertz@vincentz.net

Anette Pennartz
T +49 511 9910-240
anette.pennartz@vincentz.net

International Sales Representatives

BeNeLux
Jacqueline Poppe
Beech BP
T +31 547 271071
jacqueline@beechbp.nl

France
Melanie Villard
MKV Conseil
T +33 9 757927430
melanievillard@outlook.com

United Kingdom/North America
Dave Weidner
Blue World Partners
T +1 603 556 7479
info@blueworldpartners.com



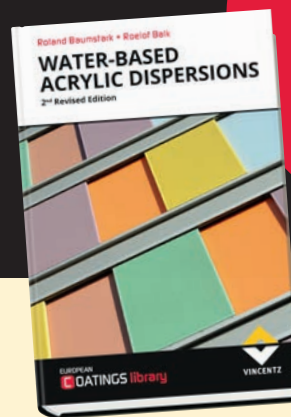


Table of Contents

1 Introduction and basic principles	2.3.2 Interior and exterior paints		7 Interior paints
1.1 Architectural coatings and binders	2.4 Formulation constituents of an emulsion paint	4.3.10 General properties of dispersion silicate paints and plasters	7.1 Introduction and definition
1.1.1 Polymer dispersions	2.4.1 Paint binder	4.4 Polymer dispersions as binders in silicone resin systems	7.2 Base technical requirements for interior paints
1.1.2 Binder classes, polymerization and polyacrylates	2.4.2 Pigments	4.4.1 Introduction	7.3 Pigment binding capacity and critical pigment volume concentration
1.1.3 Free-radical polymerization and emulsion polymerization	2.4.3 Fillers	4.4.2 Polymer dispersions in silicone resin systems	7.3.1 Factors influencing the CPVC
1.2 Polyacrylates: pure acrylic and styrene-acrylic copolymers	2.4.4 Additives	4.4.3 Pigment binding capacity	7.4 Wet and dry hiding power
1.3 Film formation of polymer dispersions	3 Primers	4.4.4 Silicon resin emulsions and CPVC	7.4.1 Influencing parameters and possibilities to reduce titanium oxide
1.3.1 Mechanism and minimum film forming temperature	3.1 Definitions and requirements	4.4.5 Weathering behaviour	7.5 Processing/application properties
1.3.2 Parameters determining the minimum film forming temperature	3.2 Aqueous primers based on acrylic dispersions	4.4.6 Demands imposed on an appropriate dispersion	7.6 High-volume application in one operation (one-coat paint)
1.3.3 Coalescents/solvents and plasticizers	3.3 Formulation of primers	4.4.7 Formulation of silicone resin paints	7.7 Open time
1.3.4 Environmental aspects	3.4 Test methods	4.4.8 Silicone resin plasters	7.8 Mud cracking
1.4 Parameters and properties of architectural coatings binders	4 Exterior paints on mineral substrates	4.5 Elastic coating systems	7.9 Tinting
1.4.1 Total solids content	4.1 Introduction	4.5.1 Introduction	7.10 Wet abrasion resistance or wet scrub resistance
1.4.2 pH value	4.2 Masonry paints	4.5.2 Effective protection against moisture, according to Künzel	7.11 Emission and solvent-free interior paints (low VOC)
1.4.3 Viscosity and rheology	4.2.1 Basics on binders, standards and types of masonry paints	4.5.3 Principal requirements of coating systems for renovating façades	7.12 Renewables in binders and modern interior paints
1.4.4 Coagulum	4.2.2 Durability of masonry paints	4.5.4 Mechanical properties of dispersion films	7.13 Biocide-free and anti-allergic interior paints
1.4.5 Particle size/particle size distribution	4.2.3 Masonry paints based on polymer dispersions – binders and formulation parameters	4.5.5 Dirt pickup resistance	7.14 Formulation scheme for interior paints
1.4.6 Surface tension	4.2.4 Masonry paints formulated at high PVC	4.5.6 Standards	7.15 Semi-gloss interior paints – latex paints and stain resistance
1.4.7 Stability	4.2.5 Solvent-free exterior paints: influence of the T _g of styrene-acrylate binders and of the type of titanium dioxide	4.5.7 Binder polymers on the market	
1.4.8 Residual monomers and volatiles	4.2.6 Important other exterior paint functionalities and influence parameters	4.5.8 Formulations	
1.4.9 Molecular weight/molecular weight distribution	4.2.7 General formulation hints for masonry paints	4.6 Comparison of different masonry paint systems	
1.4.10 Mechanical properties of polymers and paint films	4.2.8 House paints	4.7 Outlook	
1.5 Parameters influencing binder properties during their preparation	4.2.9 Tinting colours and full colour or deep-tone paints	5 Wood coatings	8 Plasters and renders
1.5.1 Monomer selection	4.3 Polymer dispersions in silicate systems	5.1 Special features of wood as a building material	8.1 Introduction and definition
1.5.2 Emulsifiers and protective colloids	4.3.1 Introduction	5.2 Classification of wood coatings and market	8.2 Classification of synthetic resin plasters, technical requirements
1.5.3 Initiators and chain transfer agents	4.3.2 Resistance to hydrolysis	5.2.1 Primers/impregnating stains	8.2.1 Requirements imposed on the binder
1.5.4 Buffer substances and neutralizing agents	4.3.3 Water absorption	5.2.2 Stain blocking primers	8.2.2 Binding power
1.5.5 Preservatives	4.3.4 Interactions between dispersion and water glass	5.2.4 Binders for wood coatings	8.2.3 Water absorption and moisture protection
1.5.6 Defoamers	4.3.5 Demands imposed on an optimum dispersion	5.2.5 Interior wood finishes	8.2.4 Thermoplasticity, alkali resistance and burning behaviour
1.5.7 Polymerization control	4.3.6 The silicate dispersion system	6 Gloss emulsion paints	8.2.5 Processing properties
1.5.8 Multi-phase systems	4.3.7 Silicate dispersion plasters	6.1 Introduction and requirements	8.3 Surface structures
1.5.9 Seed polymerization	4.3.8 Suggested formulation for a dispersion silicate or silicate emulsion paint	6.2 Gloss and haze	8.3.1 Coloured aggregates or marble stone finish
1.5.10 Hybrids	4.3.9 Suggested formulation for a silicate dispersion plaster	6.3 Binders for gloss emulsion paints	8.4 Exterior insulation and finish systems (EIFS or ETICS)
2 Formulation of aqueous architectural paints		6.3.1 Binders and gloss	8.5 Formulation scheme for synthetic resin plaster
2.1 Introduction		6.3.2 Titanium dioxide and gloss; effect of the dispersing operation	8.6 "Winter quality" – quick drying formulations
2.2 Requirements of paint		6.4 Properties of acrylic gloss emulsion paints	8.7 Typical binders for synthetic resin plasters
2.3 Composition of architectural paints		6.5 Interaction with associative thickeners	8.7.1 Marble stone finishes
2.3.1 Pigment volume concentration			




Yes, we would like to present our company
in the new technical book

WATER-BASED ACRYLIC DISPERSIONS


Roland Baumstark + Roelof Balk

and order the following advertisement:

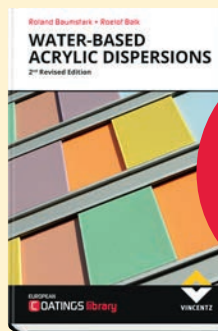

Print run:
min. 500
copies

1/1 page (4c)

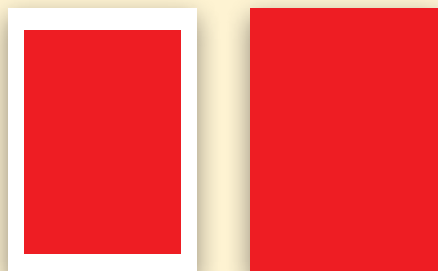


120 mm x 180 mm
(type area)

or 155 mm x 225 mm
(bleed size)

- Position in the **front section** of the book:
→ between masthead, foreword, table of contents
€ 2,190

- Position in the **inner section** of the book:
→ in chapter (see Table of Contents): _____
(any requested position/chapter possible!)
€ 2,690

1/2 page horizontal (4c)

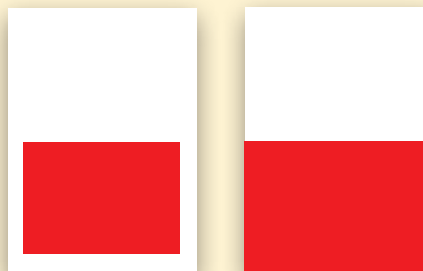

120 mm x 85 mm
(type area)

or 155 mm x 110 mm
(bleed size)

- Position in the **front section** of the book:
→ between masthead, foreword, table of contents
€ 1,690

Bookmark

- max. 60 mm x 120 mm
or max. 70 mm x 105 mm

- excl. production **€ 2,690**
 incl. production* **€ 3,190**

*excl. artwork
(to be supplied by advertiser)



Company

First name, Last name

E-mail

Date, Place

Signature

Company stamp

Closing date for
advertisements:
**9 September
2022**

All rates subject to VAT where applicable.

Ad material (PDF, min. 300 dpi) due: 16 September 2022
via E-mail to: kristijan.lugaric@vincentz.net